



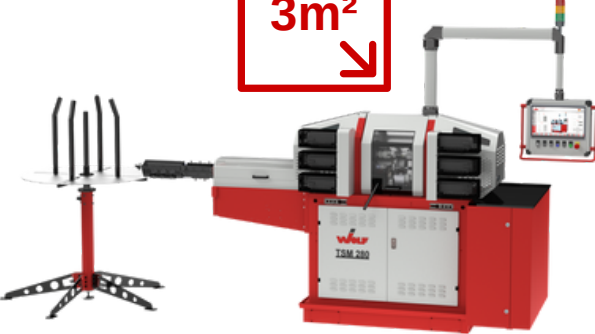


















# Wolf TSM 280

Raw material	Machine Setup		Finished Product
<div>Coil</div> 	<div> ≤ 1.200 kg</div> <div> ≤ Ø 13 mm</div>	<div>Minimal space requirement!</div> <div></div> 	<div>2s, 1,8s, 1,9s, 0,7s</div> 
<div>Bars / Profile Special Profile</div> 	<div>length up to 6 m</div> <div> ≤ Ø 30 mm</div>		<div>6s, 3,5s, 2s</div> 
<div>Tube</div> 	<div>length up to 6 m</div> <div> ≤ Ø 45 mm</div>		<div>1,8s, 3s, 2s</div> 
<div>Rework</div> 	<div> cold formed</div> <div> cast iron</div>		<div>3,5s, 2,2s, 2,8s</div> 

Energy efficient | Quick to convert | Very robust  
Extremely economical | Short cycle times | Precise